



1. Unpack the luminaire.




2. Fasten the light fixture to the prepared mounting location.




3. By loosening the screws, open the cover of the connecting part.



4. Connect the power cable to the terminal block.

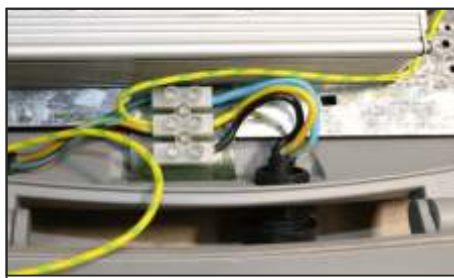

5. 3 core cable connection.

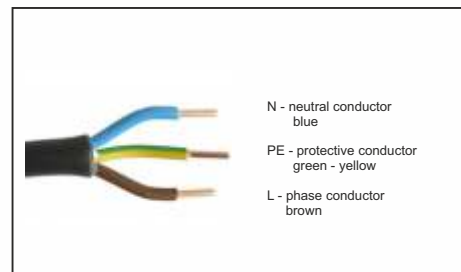

6. Attach the luminaire fixture to the designated location using a suitable connecting material



7. Loosen the locking screws and tilt the luminaire to the desired angle.




8. After tilting to the desired position, tighten the screw again.




NITYA S

NITYA M

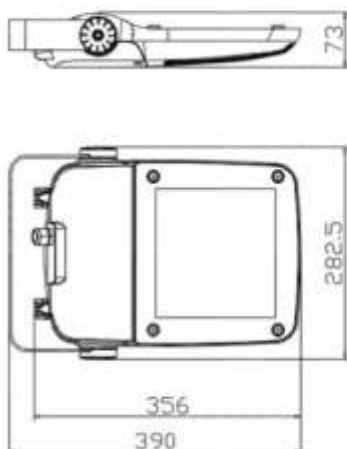


= 4,4 kg

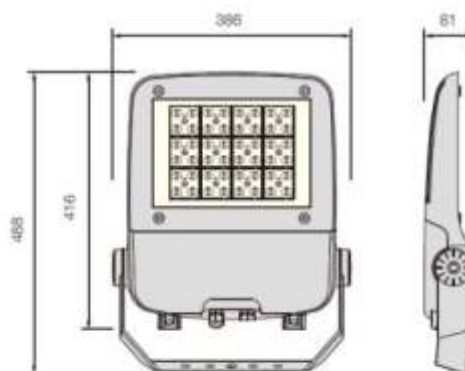

= 8,0 kg



NITYA L

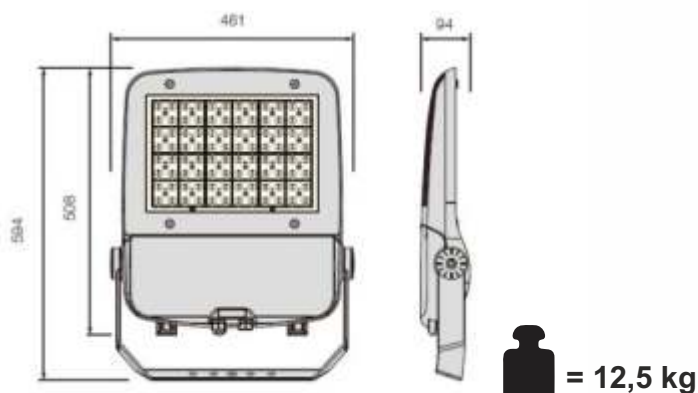

Recommended installation height up to 6-15 meters.

- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

- The light sources in this luminaire is only replaceable by the manufacturer or their technicians or a qualified person.

- **Caution, risk of electric shock**



- Do not look directly or with optical aids into the light source RG1 d > 0,5 m



- This luminaire operates at mains voltage 220-240V, 50-60 Hz.

- Any modification to this luminaire is forbidden.

Cleaning:

clean the luminaire with the standard detergents. DO NOT use any abrasive detergents or solvents.

Installation and maintenance:

can provide only a person with an electrical qualification.

ELEKTRO-LUMEN, s. r. o.

Hranická 505
753 61 Hranice IV - Drahotuše
Česká republika

Telefon: +420 581 699 411

Fax: +420 581 699 419

E-mail: el-lumen@el-lumen.cz

Web: www.el-lumen.cz



The company reserves the right to change technical data and printing errors.
Copyright © ELEKTRO-LUMEN, s. r. o.



1. Unpack the luminaire.



2. Screw the auxiliary securing cable to the luminaire




3. Fasten the light fixture to the prepared mounting location.



4. Remove the plastic covers of the locking screws.



5. Set the desired angle of the light fixture and tighten the locking screws.

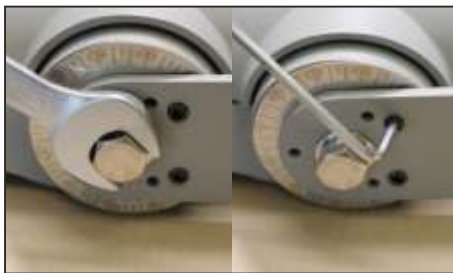

6. Using a carabiner, attach the securing cable to the eye that is at the mounting point.



7. Loosen the screws and open the cover.




8. connect the power cable to the terminal block:


N - neutral conductor, blue
PE - protective conductor, green - yellow
L - phase conductor, brown



9. Close the cover and tighten the screws



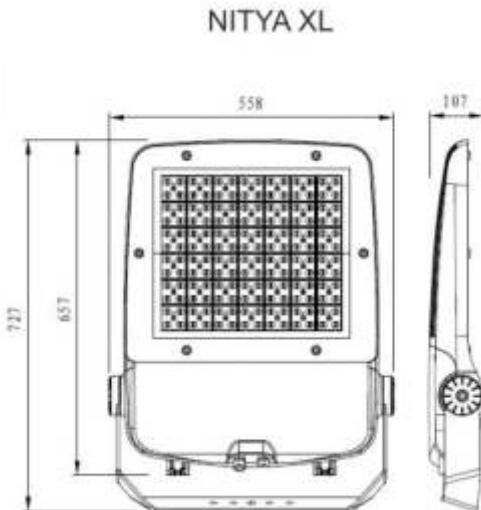

 = 21,0 kg

Recommended installation height up to 6-15 meters.

- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

- The light sources in this luminaire is only replaceable by the manufacturer or their technicians or a qualified person.

- **Caution, risk of electric shock**



- Do not look directly or with optical aids into the light source RG1 d > 0,5 m



- This luminaire operates at mains voltage 220-240V, 50-60 Hz.

- Any modification to this luminaire is forbidden.

Cleaning:

clean the luminaire with the standard detergents. DO NOT use any abrasive detergents or solvents.

Installation and maintenance:

can provide only a person with an electrical qualification.

ELEKTRO-LUMEN, s. r. o.

Hranická 505
753 61 Hranice IV - Drahotuše
Česká republika

Telefon: +420 581 699 411

Fax: +420 581 699 419

E-mail: el-lumen@el-lumen.cz

Web: www.el-lumen.cz



The company reserves the right to change technical data and printing errors.
Copyright © ELEKTRO-LUMEN, s. r. o.