

JUNO

DATASHEET | SPECIFICATIONS



TECHNICAL SPECIFICATIONS

ELECTRICAL PARAMETERS

| | |
|------------------|---|
| Light source | » LED |
| AC voltage | » AC 230 V / 50 Hz |
| Connection | » terminal block |
| Driver | » electronic driver |
| Dimming | » non-dimmable (not labeled) » DALI (DALI) » corridor function (EPS-C) |
| Emergency module | » no module (no label) » integrated emergency module, the autonomy of 1 hour (M1) » integrated emergency module, the autonomy of 3 hours (M3) |

LIGHT PARAMETERS

| | |
|-----------------------|--------------------------|
| Optical system | » reflector matte |
| Light distribution | » direct |
| Color rendering index | » Ra > 80 |
| Color temperature | » 4 000 K |
| Service life | » > 50 000 hod. (L80B50) |

CONSTRUCTION

| | |
|---------|---|
| Housing | » aluminum casting |
| Color | » RAL 9003 |
| Surface | » matte |
| Cover | » without cover |
| | » safety glass with seal (XD) cover P65 |

SAFETY

| | |
|--|--------------------|
| Protection class | » II |
| Ambient operating temperature | » max. +5 / +35 °C |
| Electrical part protection | » IP 20 |
| Optical part protection | » IP 40 |
| Mounting on normally flammable materials | » YES |

MOUNTING

| | |
|--------------------|--------------------|
| Type | » into the ceiling |
| Recommended height | » max up to 5 m |
| Cutout diameter | » 170 mm |

ACCESSORIES


| | |
|----------------------|------|
| Clips | » NO |
| Mounting accessories | » NO |

CHARACTERISTIC

Ceiling LED light for general use in interiors.

USE

- Offices
- Commercial premises
- Sanitary facilities
- Corridors
- Galerie

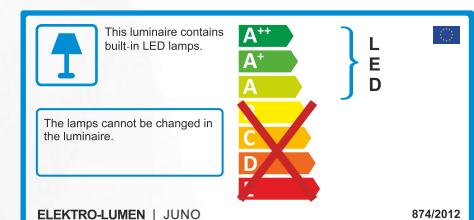


ELEKTRO-LUMEN | JUNO

874/2012

LIGHT DISTRIBUTION CURVE

JUNO

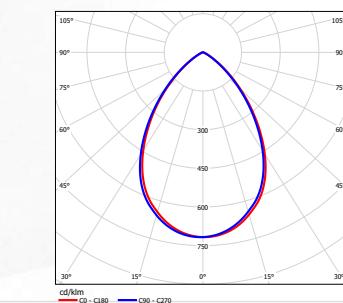

VARIANTS

DATASHEET JUNO

| TYPE | POWER | LUMINOUS FLUX | COLOR TEMPERATURE | SERVICE LIFE | WEIGHT |
|--------------|----------|---------------|-------------------|---------------|---------------|
| Name | Watt (W) | Lumen (lm) | Kelvin (K) | L80B50 (hrs.) | Kilogram (kg) |
| JUNO 1k4 840 | 14 | 1 400 | 4 000 | > 50 000 | 0,75 |
| JUNO 2k2 840 | 24 | 2 200 | 4 000 | > 50 000 | 0,75 |
| JUNO 3k0 840 | 37 | 3 000 | 4 000 | > 50 000 | 0,75 |

| LEGEND | |
|----------------------|---|
| JUNO 2k2 840 DALI M1 | name |
| | luminous flux 2 200 lm |
| | color rendering index Ra >90, color temperature 4 000 K |
| | dimming DALI (DALI) |
| | integrated emergency module, the autonomy of 1 hours (M1) |

Optical and electrical parameters tolerance +/- 10%.

DIMENSIONS

JUNO

