


SAKURA S 111

DATASHEET | SPECIFICATIONS

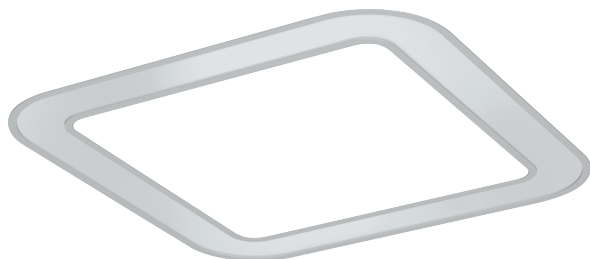

TECHNICAL SPECIFICATIONS

ELECTRICAL PARAMETERS

Light source	» LED
AC voltage	» AC 230 V / 50 Hz
Connection	» terminal block
Driver	» electronic driver
Dimming	» non-dimmable (not labeled) » DALI (DALI)
Emergency module	» NO

LIGHT PARAMETERS

Optical system	» difuzor
Light distribution	» direct
Color rendering index	» Ra > 80
Color temperature	» 3 000 K » 4 000 K
Service life	» > 60 000 hours (L80B10)

CONSTRUCTION

Housing	» painted aluminum
Color	» white (without markings) » other shades according to the RAL swatch
Surface	» mat
Cover	» opal (DSO)

SAFETY

Protection class	» I
Ambient operating temperature	» +5 / +35 °C
Electrical part protection	» IP 40
Mounting on normally flammable materials	» YES

MOUNTING

Type	» embedment (S)
Recommended height	» to 8 m

ACCESSORIES


Mounting accessories	» according to the variant
----------------------	----------------------------

CHARACTERISTIC

Design LED ceiling light designed for representative spaces.


USE

interior office classrooms
commercial premises Corridors
representative spaces

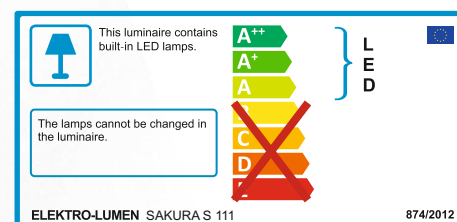

LUMINAIRE DIMENSIONS

SAKURA S 111

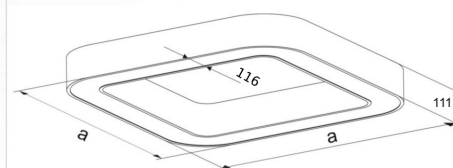

a (mm) - 616, 910, 1210

VARIANTS

DATASHEET SAKURA S 111

TYPE		POWER	LUMINOUS FLUX	COLOR TEMPERATURE	SERVICE LIFE
Name		Watt (W)	Lumen (lm)	Kelvin (K)	L80B10 (Std.)
SAKURA S 111	600x600 DSO 35W 840	40	5 750	4 000	> 60 000
SAKURA S 111	600x600 DSO 70W 840	80	11 510	4 000	> 60 000
SAKURA S 111	900x900 DSO 70W 840	80	11 510	4 000	> 60 000
SAKURA S 111	900x900 DSO 105W 840	120	17 260	4 000	> 60 000
SAKURA S 111	1200x1200 DSO 105W 840	120	17 260	4 000	> 60 000
SAKURA S 111	1200x1200 DSO 140W 840	160	23 040	4 000	> 60 000

LEGEND

SAKURA S 111 600x600 DSO 35W 840 DALI							
							name
							lamp height 111mm
							dimensional variant
							opal (DSO)
							power (W)
							color rendering index Ra > 80, color temperature 4000K
							DALI (DALI)

Optical and electrical parameters tolerance +/- 10%.