

VESUV S 111

DATASHEET | SPECIFICATIONS



CHARACTERISTIC

Design LED ceiling light designed for representative spaces.

USE

Offices Classrooms Corridors
interior commercial premises
representative spaces



TECHNICAL SPECIFICATIONS

ELECTRICAL PARAMETERS

Light source	» LED
AC voltage	» AC 230 V / 50 Hz
Connection	» terminal block
Driver	» electronic driver
Dimming	» non-dimmable (not labeled) » DALI (DALI)
Emergency module	» NO

LIGHT PARAMETERS

Optical system	» diffuser
Light distribution	» direct
Color rendering index	» Ra > 80
Color temperature	» 3 000 K » 4 000 K
Service life	» > 60 000 hours (L80B10)

CONSTRUCTION

Housing	» lacquered aluminum
Color	» white (without markings) » other shades according to the RAL swatch
Surface	» matte
Cover	» opal (DSO)

SAFETY


Protection class	» I
Ambient operating temperature	» +5 / +35 °C
Luminaire cover	» IP 40
Mounting on normally flammable materials	» YES

MOUNTING

Type	» Einbettung (S)
Recommended height	» max up to 8 m


ACCESSORIES

Mounting accessories	» according to the variant
----------------------	----------------------------

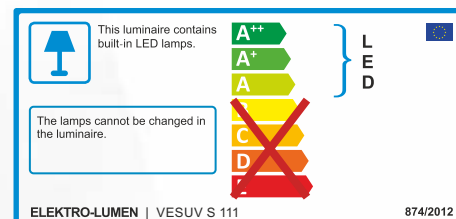

DIMENSIONS

VESUV S 111

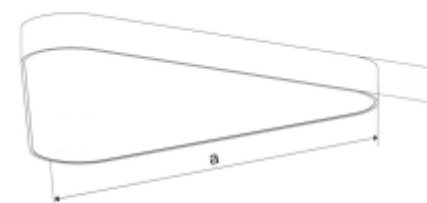

a (mm) - 906, 1206

VARIANTS

DATASHEET VESUV S 111

TYPE	POWER	LUMINOUS FLUX	COLOR TEMPERATURE	SERVICE LIFE
Name	Watt (W)	Lumen (lm)	Kelvin (K)	L80B10 (hod.)
VESUV S 111 900 DSO 70W 840	80	9 600	4 000	> 60 000
VESUV S 111 900 DSO 105W 840	120	14 400	4 000	> 60 000
VESUV S 111 1 200 DSO 105W 840	120	14 400	4 000	> 60 000
VESUV S 111 1 200 DSO 140W 840	160	19 200	4 000	> 60 000

LEGEND					
VESUV	80	900	DSO	70W	840 DALI
					name
					lamp height 111 mm
					lamp diameter
					opal (DSO)
					power (W)
					color rendering index Ra > 80, color temperature 4 000 K
					dimming DALI (DALI)

Optical and electrical parameters tolerance +/- 10%.